



GEOSTONE STANDARD BLOCK

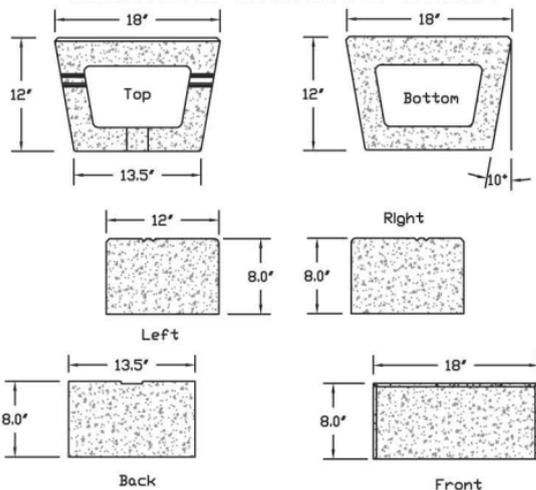


75 LBS


GEOSTONE LANDSCAPE BLOCK

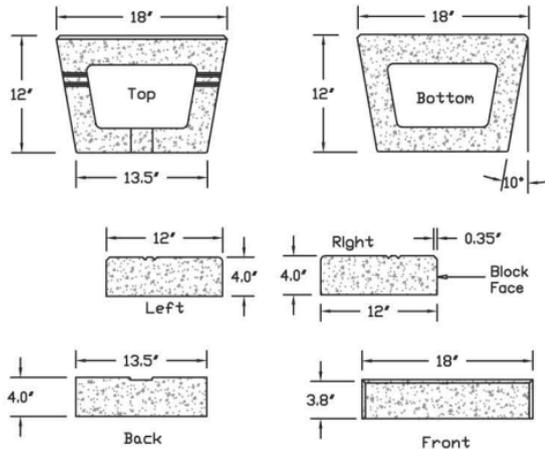

37.5 LBS

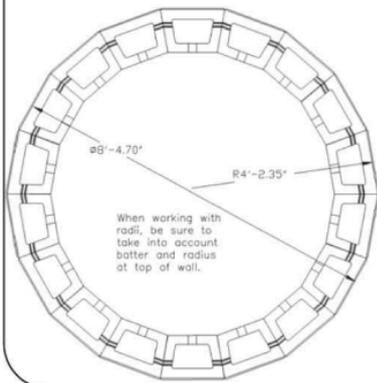


A. Cut the block with a diamond blade concrete saw 2-3 inches longer than what will be needed. This edge will be split off as illustrated below.



B. Using a paver splitter, break off a small section at the point on the block that will allow for the correctly measured corner. This will give you a finished edge.

THE DIGGS CORNER

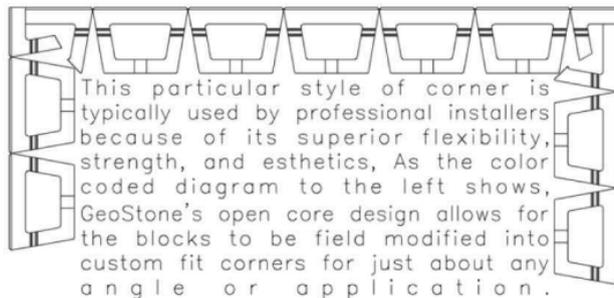

General Notes

GEOSTONE RETAINING WALLS ARE MADE TO ADJUST FOR DIFFERENT HEIGHTS AND SITUATIONS. REINFORCEMENT IS SOMETIMES REQUIRED. PLEASE REFER TO

www.geostone.com FOR GENERAL REINFORCING PROCEDURES AND GUIDELINES. ALSO PLEASE NOTE THAT

A LOT OF MUNICIPALITIES WILL REQUIRE THAT RETAINING WALLS OVER 4 FEET IN HEIGHT BE DESIGNED AND STAMPED BY A PROFESSIONAL ENGINEER. PLEASE CHECK WITH YOUR LOCAL MUNICIPALITY PRIOR TO ANY CONSTRUCTION.



GEOSTONE
RETAINING SYSTEMS

No. Installer/Owner Date

New Item not Allowed

Repeat Item not Allowed

Value
Value
Value
Value

Repeat	Value	Sheet
Date	8/1/2008	00
Notes	As Noted	